



RUNWAY 04/22 SURFACING WORKS LAYOUT PLAN
SCALE = 1:2000

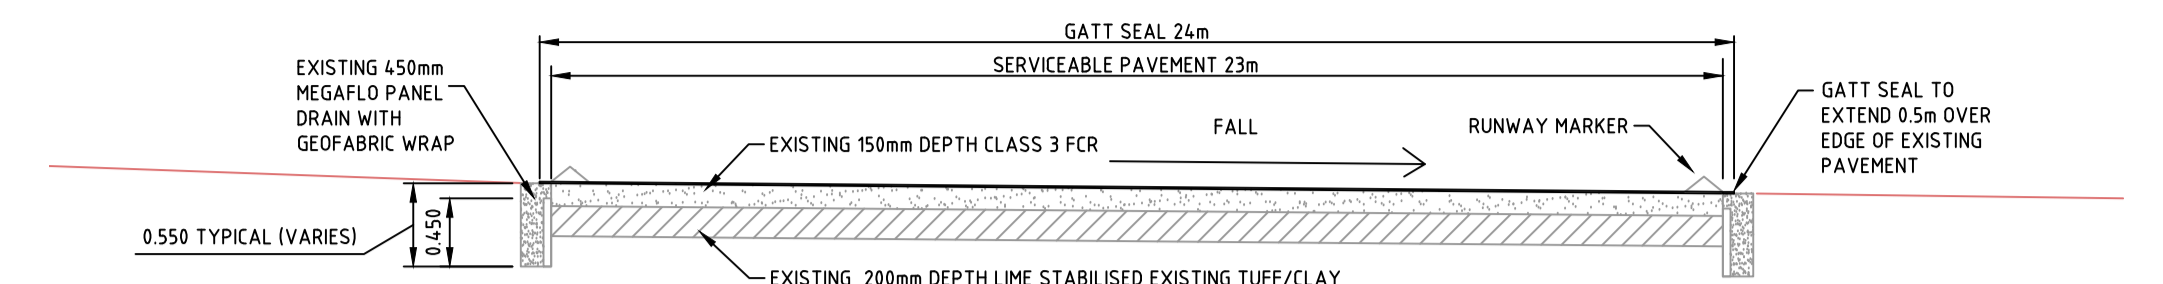


RUNWAY STRIP TYPICAL CROSS SECTION
SCALE = NTS

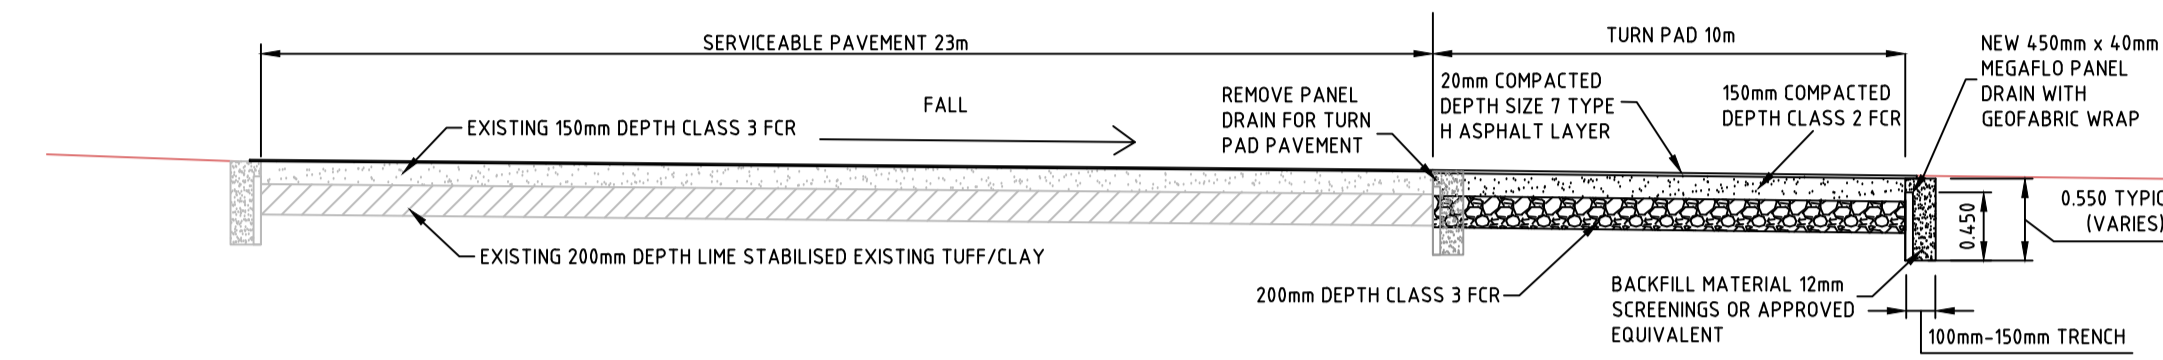


TURNAROUND PAVEMENT TREATMENT
SCALE = NTS

MEGAFLO PANEL DRAINAGE GENERAL NOTES:


- TRENCHING
- Trenches should be constructed to line and level to achieve a minimum of 100mm cover for general load applications.
 - Trench width is to be a minimum of 100mm.
- GEOTEXTILE
- Geotextile lining for trenches is optional. If a lining is used, bidim geotextile filter fabric must line the sides, base and top of the trench, with an overlap similar to the trench width.
- PLACEMENT
- Pavement edge drainage applications require the panel drain to be placed vertically against the side wall of the trench, closest to the direction of water infiltration.
- BACKFILLING
- Megaflo Green can be installed with a range of standard filter gradings, including coarse washed sand, drainage aggregates and no fines concrete.
 - Well graded, washed sand is the recommended backfill material. Backfill should be placed in maximum 150mm lifts to 95% standard compaction. Washed sand backfill can be watered in for effective compaction.

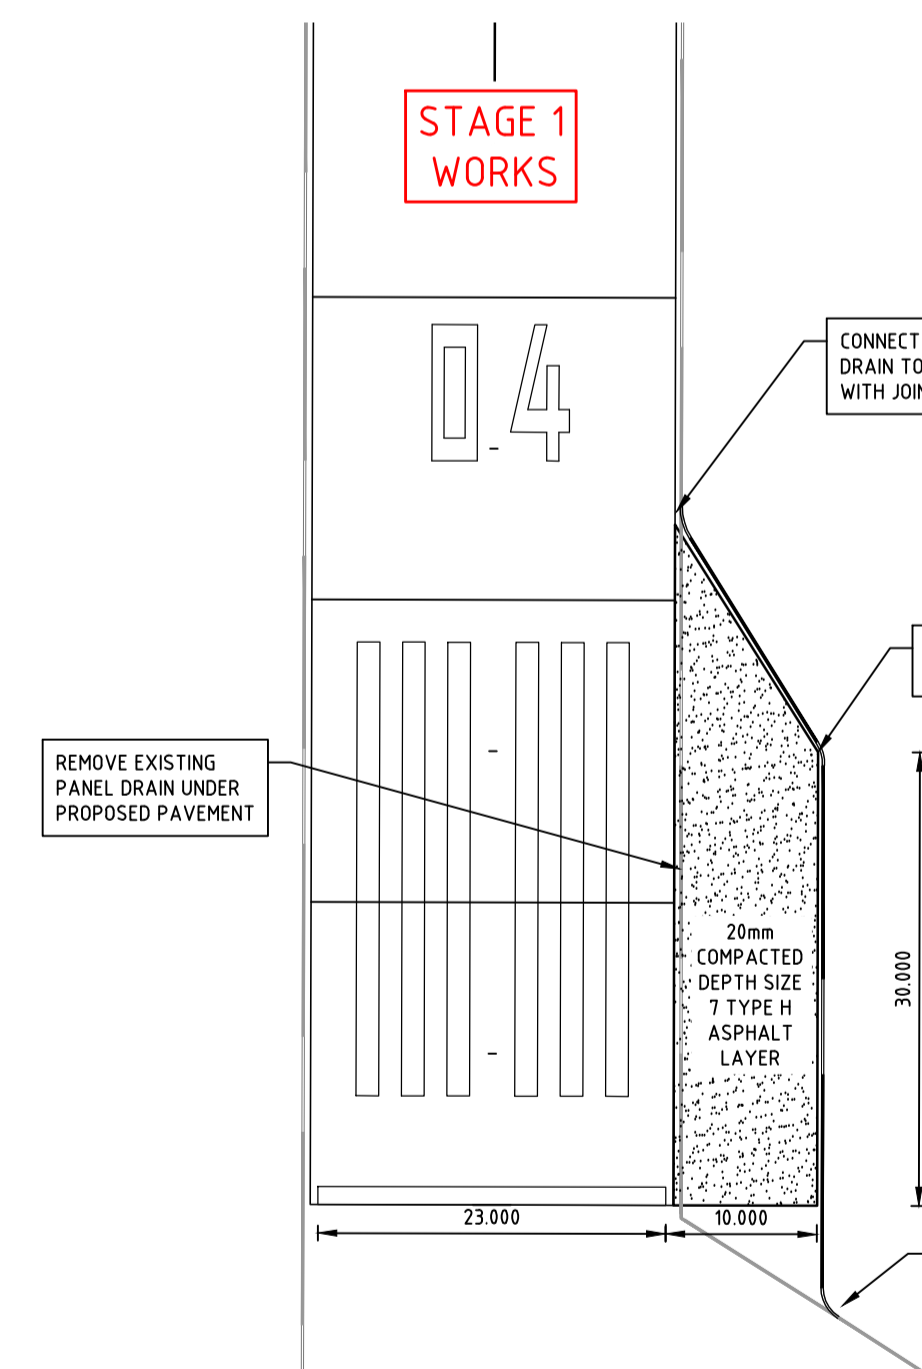

SOUTH END DRAINAGE DETAIL
SCALE = 1:500

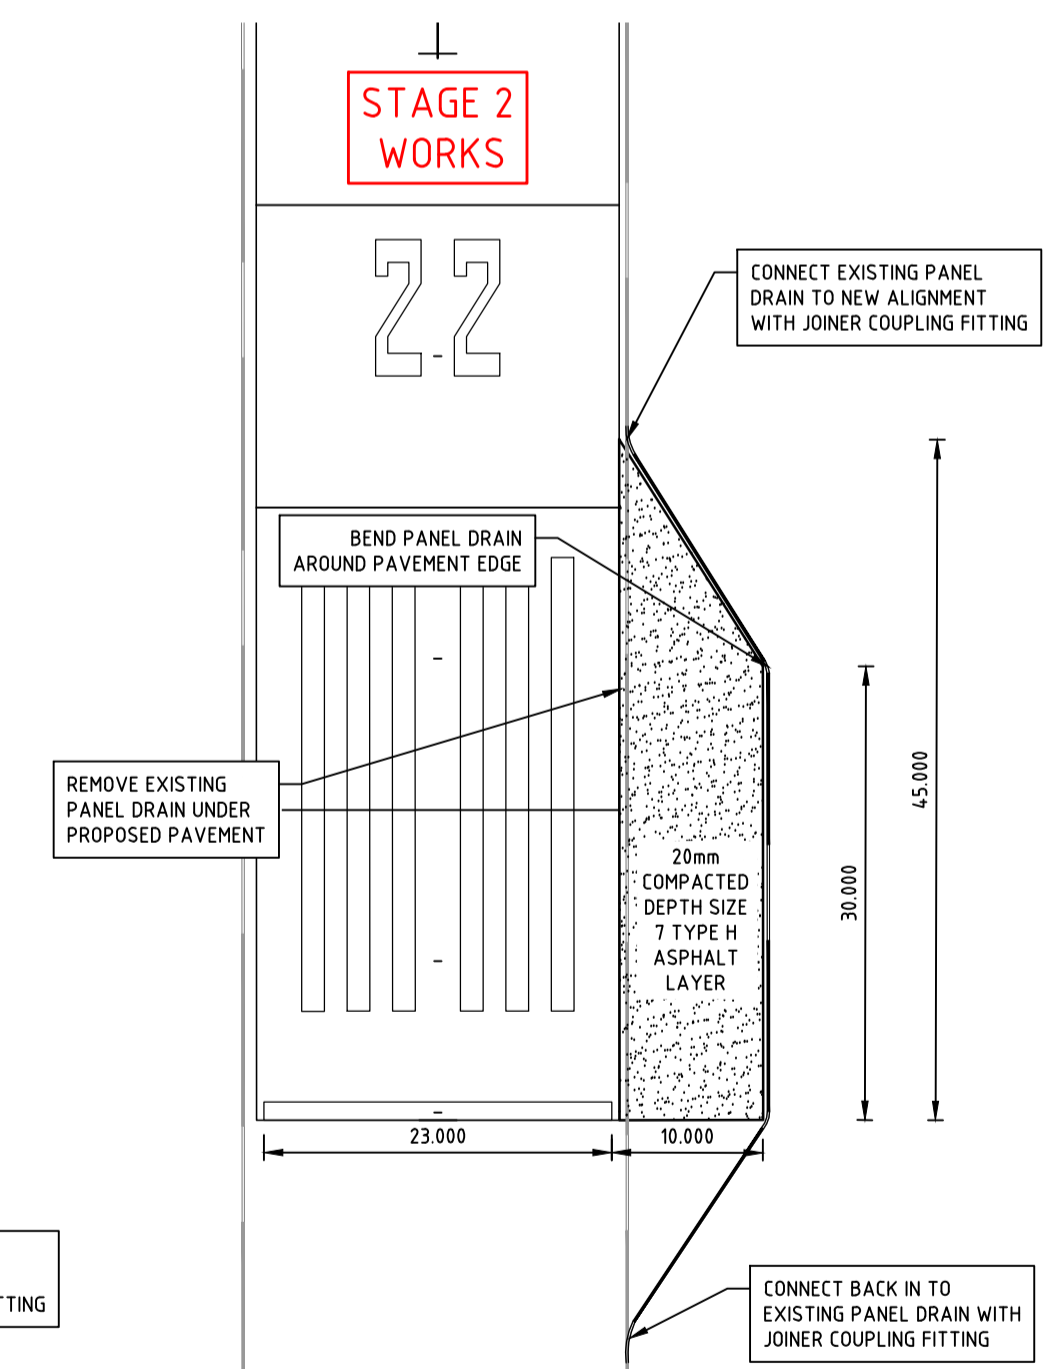

NORTH END DRAINAGE DETAIL
SCALE = 1:500

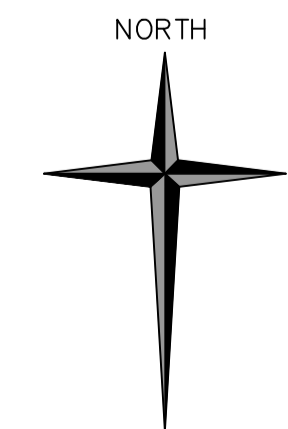

WARNING
BEWARE OF UNDERGROUND SERVICES
THE LOCATION OF UNDERGROUND SERVICES ARE APPROXIMATE ONLY, AND THEIR EXACT POSITION SHOULD BE PROVEN ON SITE. NO GUARANTEE IS GIVEN THAT ALL EXISTING SERVICES ARE SHOWN.

REV	DESCRIPTION	DATE
A	PROPOSED TURNING PAD DETAIL	13/12/21
B	TURNING NODE WORKS DETAILS	10/11/22



DRAWN: P. O'BRIEN	DATE: 13/12/2021
CHECKED: P. MORRIS	DATE: 17/12/2021
SCALE: A1 1:AS	PROJECT DATE: DECEMBER 2021
CAD FILE: s:\city_infrastructure\technical_services\projects\2021\pro2021072 runway 04-22 resurfacing and end treatments\cad\airport layout-plan.dwg	

PROJECT: WARRNAMBOOL AIRPORT RUNWAY 04/22 - LINEMARKING AND PAVEMENT DETAIL		
DRAWING TITLE: DETAIL		
PROJECT No: PRO2021072	SHEET No: 1 OF 1	REV: A